

R A N D O M U N I V E R S



ELECSTAR

**ELECSTAR Professional Refrigeration**

**Ver.0128**

## INTRODUCTION

### ABOUT US

*We are neither manufacturer nor trader!*

We are a sourcing company help customer find the balance between quality and price.

### OUR AIM

*To creat or raise your brand!*

With our 7 years sourcing experience in refrigeration field,we would like to be your partner to creat or raise your brand!

### OUR PRODUCT

*We have Star,Standard,Basic three ranges products:*

- | Star products promise 100% satisfaction guaranteed.
- | Standard products is top of the range but inferior to Star grade..
- | Basic products is low price general quality.

Except the above three ranges,we also have many special products to meet your special demands!

INDEX



For Bar

4 to 7



For Shop

8 to 14



For Bakery

15 to 18



For Kitchen

19 to 24



For Home

25 to 28



For Medical

29 to 31

INNOVATION



CVS Freezer

Curved glass CVS freezer with 1.5m and 2m two sizes available.



Jumbo Freezer

1.5m,2m,2.5m three sizes available.



Open air island freezer

1.5m,2m,2.5m three sizes available. Island Chiller or Sub-zero island beer cooler also available.

Keg dispenser

Black door or faux stainless steel door. Single or dual tap.



Static ice cream showcase

Static cooling.  
Holding 14x1/4Pans



Countertop ice cream freezer

Stainless steel body, static cooling system. Built in design.



Back Bar Cooler



Model	C1H	C2H840	C2S840	C3H840	C3S840
Unit Dimensions	595*520*840	895*520*840	895*520*840	1350*520*840	1350*520*840
Dooy Type	Hinged	Hinged	Sliding	Hinged	Sliding
Capacity Litre	138	208	208	318	318
Temp Range	0/+10	0/+10	0/+10	0/+10	0/+10
Loading 40HQ	214	148	148	98	98

I Height 900 or 840mm.Solid or glass door.Remote or built-in type.



Model	SGC2	SGC3	SGD300	SGD500
Unit Dimensions	1462*520*860	2002*520*860	600*500*1700	600*500*1700
Finish	White or S/S	White or S/S	White or S/S	White or S/S
Capacity	340	510	300	500
Temp Range	0/+10	0/+10	0/+10	0/+10
Loading 40HQ	mix	mix	72	48

Custom-made series



side and top rack



solid door



-9°C froster



-18°C freezer

Wine Cooler

**Built-in series**



BI24(24bottle)



BI47



BI41D(dual zone)

**Built-under series**



BU7(7bottle)



BU19



BU46



BU46D(dual zone)

**Custom-made series**



Countertop wine barrel



wine barrel



Slimline wine cooler(500mm depth)



BAR

**Storage Cabinet**



Model	<b>BC145</b>	<b>BD115</b>	<b>BC90</b>	<b>BC90OD</b>
Unit Dimensions	<b>595*595*820</b>	<b>595*595*820</b>	<b>370*585*836</b>	<b>370*585*836</b>
Finish	White or S/S	White or S/S	Black or S/S	Black or S/S
Capacity	150	120	90	90
Temp Range	0/+8	-16/-24	0/+8	0/+8
Loading 40HQ	162	162	298	298



Model	<b>LC170</b>	<b>LD120</b>	<b>LC386</b>	<b>LD330</b>
Unit Dimensions	<b>595*595*850</b>	<b>595*595*850</b>	<b>600*590*1960</b>	<b>600*590*1960</b>
Finish	White or S/S	White or S/S	White or S/S	White or S/S
Capacity	170	120	396	330
Temp Range	0/+8	-18/-20	0/+10	-18/-20
Loading 40HQ	147	147	57	57



Model	<b>BC490</b>	<b>BD508</b>	<b>BC600</b>	<b>BD600</b>
Unit Dimensions	<b>700*740*1800</b>	<b>700*740*1800</b>	<b>780*740*1900</b>	<b>780*740*1900</b>
Finish	White or S/S	White or S/S	White or S/S	White or S/S
Capacity	500	500	600	600
Temp Range	0/+10	-18/-22	0/+10	-18/-22
Loading 40HQ	42	42		

**Ice Maker**



Model	I25	I40	I60	I80	I225
Unit Dimensions	400x500x770	500x550x850	675x570x890	675x570x980	600x850x1480
Ice Type	<b>Cube</b>	<b>Cube</b>	<b>Cube</b>	<b>Cube</b>	<b>Cube</b>
Capacity 24hr	25kg	40kg	60kg	80kg	225kg
Power watts	310	360	420	180	1200
Loading 40HQ	Mix	Mix	Mix	Mix	mix



Model	IM26L	IM25	IM25A	IM50A	IM70A
Unit Dimensions	398x512x620	398x542x682	398x512x820	398x512x820	500X612X900
Ice Type	<b>Bullet</b>	<b>Bullet</b>	<b>Bullet</b>	<b>Bullet</b>	<b>Bullet</b>
Capacity 24hr	26kg	25kg	25kg	50kg	70kg
Power watts	240	240	240	380	420
Loading 40HQ	399	285	285	285	136

**CUSTOM-MADE**



Ice dispenser ID12



Ice dispenser ID12T



Ice dispenser ID25



Ice dispenser ID12T



Ice Flaker



Outdoor ice maker



Bottle water ice maker



Water Dispenser Ice Maker





EOS series <Elecstar Exclusive>

ICE CREAM



Top open glass door freezer 100L



Solid door or Stainless steel door



Europe Energy Class A+ or B 350/450/550/650L

Denmark standard dimensions optional to hold 6/8/10/12 ice cream barrels.

Model	EOS 100H	EOS 350H	EOS 450H	EOS 550H	EOS 650H
Capacit litres	110	350	450	550	650
Net Capacit litres/	100	272	358	450	550
Packing	650*590*875	1080*780*890	1320*780*890	1580*780*890	1860*780*890
Units	634*584*844	1030*755*840	1270*755*840	1530*755*840	1810*755*840
Test Result	<-18°C	<-18°C	<-18°C	<-18°C	<-18°C
Refrigerant	R134a	R134a	R134a	R134a	R134a
Climate	Class 4+	Class 4+	Class 4+	Class 4+	Class 4+
40' HQ(with	180	98	80	66	57
Approval	CE	CE	CE	CE	CE

**SUPERSTAR series <Supermarket Star>**

ICE CREAM



**CVS Freezer SD500BY/700BY**



**Jumbo Freezer SD580/780/980**



**Flat glass CVS Freezer XS570**



Island freezer or chiller. Curved glass or flat glass or open top. Aluminum door frame or single mould plastic door frame. Bumper strip and LED line.

**China most kinds of island freezer only in Elecstar.**

Model	SD500BY	SD700BY	SD580	SD780	SD980
Capacit litres	500	700	580	780	980
Net Capacit litres/	500	700	580	780	980
Packing	1525*807*880	2050*807*880	1670*1080*860	2170*1080*860	2670*1080*860
Units	<b>1475*757*818</b>	<b>2000*757*818</b>	<b>1536*936*770</b>	<b>2036*936*770</b>	<b>2536*936*770</b>
Test Result	<-18℃	<-18℃	<-18℃	<-18℃	<-18℃
Refrigerant	R134a	R134a	R134a	R134a	R134a
Climate	Class 4+	Class 4+	Class 4+	Class 4+	Class 4+
40' HQ(with	62	41	42	33	24
Approval	CE	CE	CE	CE	CE

4 Sided Glass Cooler

BEVERAGE



Stainless Steel finish



Top compressor



Pass-through door



Curved glass door

All kinds of 4 sided glass cooler can custom-made.

Model	RT58L	RT68L	RT78L	RT98L
Climate Type	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Machine Dimension	427*383*772	427*383*872	427*383*1022	427*383*1022
Packing Dimension	485*450*830	485*450*930	485*450*1080	485*450*1080
N/G Weight	28/31.5	32/35.5	38/42	38/42
Rated/Frequency	220V or 110V	220V or 110V	220V or 110V	220V or 110V
Loading Capacity/40HQ	258	258	258	258
Approval	CE/ETL	CE	CE	CE

4 Sided Glass Cooler

BEVERAGE



With light box

Stainless Steel finish

All kinds of 4 sided glass cooler can custom-made.

Model	RT215L	RT235L	RT280L	RT500L
Climate Type	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a
Machine Dimension	515*485*1595	515*485*1695	515*485*1895	650*650*1945
Packing Dimension	580*540*1660	580*540*1760	580*540*1960	720*720*2010
N/G Weight	73/77	76/80	88/94	110/114
Rated/Frequency	220V or 110V	220V or 110V	220V or 110V	220V or 110V
Loading Capacity/40HQ	76	76	76	48
Approval	CE	CE	CE	CE



Coldflow Open Front Cooler



Xs



Mini



A



B2



Slim



C1



C2



C3



D1



D2



D3



E



F



G



H



I

MULTIDECK



J



Upright Cooler K



Upright Freezer L



San Francisco



St Paul



St Louis



Florida (remote type)



Texas (remote type)

Serve-over Counter



X1/X2



70TN/70BT



120TN/120BT



Miami



Memphis



New York



New Orleans



Arizona (remote type)



Combi Freezer



S/S Open Display

BEVERAGE



Optional Hot display

All kinds of 4 sided glass cooler can custom-made.

Model	RTS180L	RTS220L	RTS220L-2	RTS200L	RTS250L
Climate Type	N	N	N	N	N
Refrigerant	R134a	R134a	R134a	R134a	R134a
Machine Dimension	600*494*1450	600*494*1740	670*512*1792	1000*560*1250	685*610*1704
Packing Dimension	666*560*1510	666*560*1808	740*585*1860	1060*625*1310	761*691*1780
N/G Weight	96/100	106/111	121/127	115/121	128/135
Rated/Frequency	220V or 110V	220V or 110V	220V or 110V	220V or 110V	220V or 110V
Loading	72	72	60	40	51
Approval	CE	CE	CE	CE	CE



Cold Display



RTW110L/165L



RTW100L/185L



RTW105L/120L/160L



RTW-130L-1/160L-2



RTW-130L-2/201L



RTW-175L/255L



RTC72L



RTW108L



Stainless stell RT78L-8

Hot Display



RTR-120L/160L



RTR-130L/160L-2



RTR-76L/96L



RTR-136L/186L



RTR-97L/137L



RTR-107L



RTR-97L-2



RTR-60L/110L/156L



RTR-60L-1/110L-1/156L-1



SC58BW



S46BW



S60BW

Bakery/Ice Cream Shop Equipment



Countertop ice cream



Static Cooling ice cream



Ventilated Cooling ice cream



Ice cream Cabinet



Curved Cabinet



Drop-in Cabinet



Single Curve



Double Curve



Upright type



Three shelf single curve



Three shelf double curve



Square type

## Kitchen Refrigerator / Freezer



Model	GN650TNA	GN650TN2A	GN1410TN2A	GN1410TN4A
<b>Exterior Dimensions(mm) W*D*H</b>	739* 830* 2000	739* 830* 2000	1390* 830* 2000	1390* 830* 2000
<b>Interior Dimensions(mm) W*D*H</b>	589* 685* 1383	589* 685* 1383	1240* 685* 1383	1240* 685* 1383
<b>Net Volume(L)</b>	558	558	1175	1175
<b>Temperature Range(°C)</b>	0~10°C	0~10°C	0~10°C	0~10°C
<b>Compressor Power(W)</b>	275	275	545	545
<b>Refrigerant</b>	R134a	R134a	R134a	R134a
<b>Isolation Material</b>	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
<b>Cooling System</b>	Ventilated	Ventilated	Ventilated	Ventilated
<b>Defrosting</b>	Automatic	Automatic	Automatic	Automatic
<b>Net Weight(kg)</b>	115	115	225	225
<b>Packing Dimensions(mm) W*D*H</b>	770*900*2040	770*900*2040	1440*900*2040	1440*900*2040
<b>Temperature Display</b>	Yes	Yes	Yes	Yes
<b>Quantity of Door</b>	1	2	2	4
<b>Self-closing Door</b>	Yes	Yes	Yes	Yes
<b>Lock Mounted</b>	Yes	Yes	Yes	Yes
<b>Quantity of GN pan</b>	3xGN 2/1	3xGN 2/1	6xGN 2/1	6xGN 2/1
<b>Quantity of Shelves</b>	3	3	6	6
<b>Housing Material</b>	SUS304	SUS304	SUS304	SUS304
<b>Door /Lid Material</b>	SUS304	SUS304	SUS304	SUS304
<b>Liner Material</b>	SUS304	SUS304	SUS304	SUS304
<b>Shelf Material</b>	φ8 coated steel	φ8 coated steel	φ8 coated steel	φ8 coated steel
<b>Type of Controller</b>	digital	digital	digital	digital
<b>Shelf Loading (kg/pc)</b>	80	80	80	80
<b>Climate Rating</b>	32°C	32°C	32°C	32°C
<b>Connection Rating Amps/Watts</b>	2.7A/450W	2.7A/450W	3.4A/600W	3.4A/600W
<b>Voltage/Frequency</b>	220V/50HZ; 115V/60HZ	220V/50HZ; 115V/60HZ	220V/50HZ ; 115V/60HZ	220V/50HZ ; 115V/60HZ

## Table Counter



Model	TG14B6L2	TG18B6L3	TD14B7L2	TD18B7L3
Exterior Dimensions(mm) W*D*H	1400*600*850	1875*600*850	1400*700*850	1875*700*850
Interior Dimensions(mm) W*D*H	990*580*643	1465*580*643	990*580*643	1465*580*643
Net Volume(L)	336	509	336	509
Temperature Range(°C)	0~10°C	0~10°C	≤-18°C	≤-18°C
Compressor Power(W)	275	385	495	495
Refrigerant	R134a	R134a	R404a	R404a
Isolation Material	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting	Automatic	Automatic	Automatic	Automatic
Net Weight(kg)	112	137	120	145
Packing Dimensions(mm) W*D*H	1535*755*940	2010*755*940	1535*755*940	2010*755*940
Temperature Display	Yes	Yes	Yes	Yes
Quantity of Door	2	3	2	3
Self-closing Door	Yes	Yes	Yes	Yes
Lock Mounted	Yes	Yes	Yes	Yes
Quantity of GN pan	4* 1/1	6* 1/1	4* 1/1	6* 1/1
Quantity of Shelves	2	3	2	3
Housing Material	SUS304	SUS304	SUS304	SUS304
Door /Lid Material	SUS304	SUS304	SUS304	SUS304
Liner Material	SUS304	SUS304	SUS304	SUS304
Shelf Material	φ8 coated steel	φ8 coated steel	φ8 coated steel	φ8 coated steel
Type of Controller	digital	digital	digital	digital
Shelf Loading (kg/pc)	80	80	80	80
Climate Rating	38°C	38°C	38°C	38°C
Connection Rating Amps/Watts	1.15A/260W	3.17A/500W	3.71A/560W	3.39A/657W
Voltage/Frequency	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ

## Reach-in



Model	CFD-1RR	CFD-2RR	CFD-3RR	CFD-1FF	CFD-2FF	CFD-3FF
Exterior W*D*H	736*818*2095	1371*818*2095	2054*818*2095	736*818*2095	1371*818*2095	2054*818*2095
Interior W*D*H	620*688*1530	1255*688*1530	1938*688*1530	620*688*1530	1255*688*1530	1938*688*1530
Net Volume(L)	650	1321	2040	650	1321	2040
Temperature Range(°C)	0~10°C	0~10°C	0~10°C	-22~-18°C	-22~-18°C	-22~-18°C
Compressor Power(W)	590	495	550	590	854	1097
Refrigerant	R134a	R134a	R134a	R404a	R404a	R404a
Isolation Material	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Net Weight(kg)	128	203	279	128	203	279
Packing W*D*H	796*878*2120	1430*878*2120	2118*880*2170	796*878*2120	1430*878*2120	2118*880*2170
Temperature Display	Yes	Yes	Yes	Yes	Yes	Yes
Quantity of Door	1	2	3	1	2	3
Self-closing Door	Yes	Yes	Yes	Yes	Yes	Yes
Lock Mounted	Yes	Yes	Yes	Yes	Yes	Yes
Quantity of GN pan	/	/	/	/	/	/
Quantity of Shelves	3	6	9	3	6	9
Housing Material	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
Door /Lid Material	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
Liner Material	SUS304	SUS304	SUS304	SUS304	SUS304	SUS304
Shelf Material	Painted steel	Painted steel	Painted steel	Painted steel	Painted steel	Painted steel
Type of Controller	digital	digital	digital	digital	digital	digital
Shelf Loading (kg/pc)	80	80	80	80	80	80
Climate Rating	38°C	38°C	38°C	38°C	38°C	38°C
Rating Amps/Watts	3.76A/720W	3.36A/643W	3.9A/747W	6.45A/1234W	10.25A/1962W	13.87A/2652W
Voltage/Frequency	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ



## Work Table



Model	TUC27R	TUC48R	TUC27F	TUC48F
Exterior Dimensions(mm) W*D*H	685*750*895	1200*750*895	685*750*895	1200*750*895
Interior Dimensions(mm) W*D*H	565*580*597	1080*580*597	565*580*597	1080*580*597
Net Volume(L)	177	338	117	338
Temperature Range(°C)	0~10°C	0~10°C	-22~-18°C	-22~-18°C
Compressor Power(W)	175	545	370	370
Refrigerant	R134a	R134a	R404a	R404a
Isolation Material	Cyclopentane	Cyclopentane	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting	Automatic	Automatic	Automatic	Automatic
Net Weight(kg)	70	95	72	97
Packing Dimensions(mm) W*D*H	740*805*920	1255*805*920	740*805*920	1255*805*920
Temperature Display	No	No	No	No
Quantity of Door	1	2	1	2
Self-closing Door	Yes	Yes	Yes	Yes
Lock Mounted	No	No	No	No
Quantity of GN pan	/	/	/	/
Quantity of Shelves	1	2	1	2
Housing Material	SUS304	SUS304	SUS304	SUS304
Door /Lid Material	SUS304	SUS304	SUS304	SUS304
Liner Material	SUS304	SUS304	SUS304	SUS304
Shelf Material	plastic coated steel	plastic coated steel	plastic coated steel	plastic coated steel
Type of Controller	mechanical	mechanical	mechanical	mechanical
Shelf Loading (kg/pc)	60	60	60	60
Climate Rating	32°C	32°C	32°C	32°C
Connection	1.41A/243W	2.55A/257W	1.47A/257W	3.2A/441W
Rating Amps/Watts				
Voltage/Frequency	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ

## Salad Case



Model	SCL1	SCL2	SCL3
Exterior Dimensions(mm) W*D*H	698*750*1075	1188*750*1075	1787*750*1075
Interior Dimensions(mm) W*D*H	611*605*597	1088*605*597	1687*605*597
Net Volume(L)	160	268	440
Temperature Range(°C)	0~10°C	0~10°C	0~10°C
Compressor Power(W)	175	275	590
Refrigerant	R134a	R134a	R134a
Isolation Material	Cyclopentane	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated	Ventilated
Defrosting	Automatic	Automatic	Automatic
Net Weight(kg)	80	115	156
Packing Dimensions(mm) W*D*H	808*860*1157	1298*860*1157	1897*860*1157
Temperature Display	No	No	No
Quantity of Door	1	2	3
Self-closing Door	Yes	Yes	Yes
Lock Mounted	No	No	No
Quantity of GN pan	6* 1/6" 2* 1/9"	6* 1/3"	9* 1/3"
Quantity of Shelves	1	2	3
Housing Material	SUS304	SUS304	SUS304
Door /Lid Material	SUS304	SUS304	SUS304
Liner Material	SUS304	SUS304	SUS304
Shelf Material	plastic coated steel	plastic coated steel	plastic coated steel
Type of Controller	mechanical	mechanical	mechanical
Shelf Loading (kg/pc)	60	60	60
Climate Rating	32°C	32°C	32°C
Connection Rating Amps/Watts	1.54A/254W	2.55A/425W	3.71A/620W
Voltage/Frequency	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ



S900



PS900



S901



## Pizza Case



Model	PICL1	PICL2	PICL3
Exterior Dimensions(mm) W*D*H	1266*800*1088	1800*800*1088	2334*800*1088
Interior Dimensions(mm) W*D*H	696*580*665	1230*580*665	1764*580*665
Net Volume(L)	270	477	684
Temperature Range(°C)	0~10°C	0~10°C	0~10°C
Compressor Power(W)	175	275	590
Refrigerant	R134a	R134a	R134a
Isolation Material	Cyclopentane	Cyclopentane	Cyclopentane
Cooling System	Ventilated	Ventilated	Ventilated
Defrosting	Automatic	Automatic	Automatic
Net Weight(kg)	130	155	200
Packing Dimensions(mm) W*D*H	1376*910*1160	1910*910*1160	2444*910*1160
Temperature Display	No	No	No
Quantity of Door	1	2	3
Self-closing Door	Yes	Yes	Yes
Lock Mounted	No	No	No
Quantity of GN pan	6* 1/3"	9* 1/3"	12* 1/3"
Quantity of Shelves	1	2	3
Housing Material	SUS304	SUS304	SUS304
Door /Lid Material	SUS304	SUS304	SUS304
Liner Material	SUS304	SUS304	SUS304
Shelf Material	plastic coated steel	plastic coated steel	plastic coated steel
Type of Controller	mechanical	mechanical	mechanical
Shelf Loading (kg/pc)	60	60	60
Climate Rating	32°C	32°C	32°C
Connection Rating Amps/Watts	1.87A/310W	2.87A/475W	3.7A/590W
Voltage/Frequency	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ	220V/50HZ, 115V/60HZ



VRX series



PZ2610TN-VRX380



PS901

Single Door Refrigerator



Mini Refrigerator BCD88

STORAGE



All refrigerator.  
 Built-in refrigerator.  
 Built-under refrigerator.  
 All available.

Model	BC-46	BC-70	BC-80	BC-90	BC-128
Total(L/Cu.Ft.)	46/1.7	70/2.5	84/3.0	90.8/3.2	128/4.5
Refrigerator(L/Cu.Ft.)	/	/	/	/	/
Freezer(L/Cu.Ft.)	4.53/0.16	4.53/0.16	4.53/0.16	8/0.28	8/0.28
Climate Type	T	T	T	T	T
Defrosting	Manual	Manual	Manual	Manual	Manual
Refrigerant	R134a/R600a	R134a/R600	R134a/R600	R134a/R600	R134a/R600
Machine Dimension	445*473*498	445*490*635	445*475*810	445*490*800	520*572*815
Packing Dimension	462*490*515	462*540*665	462*515*835	462*540*835	560*590*855
Rated/Frequency	220V/110V	220V/110V	220V/110V	220V/110V	220V/110V
Loading Capacity	550pcs/40HQ	425pcs/40HQ	340pcs/40HQ	325pcs/40HQ	242pcs/40HQ
Approval	CE/UL	CE/UL	CE/UL	CE/UL	CE/UL

SINGLE DOOR FREEZER

STORAGE



**Built-under BD97BU**

No frost single door freezer.  
 Built-in freezer.  
 Built-under freezer.  
 All available.

Model	BD-88	BD-139	BD-176	BD-230
Total(L/Cu.Ft.)	88/3.1	139	176	230
Refrigerator(L/Cu.Ft.)	/	/	/	/
Freezer(L/Cu.Ft.)	88	139	176	230
Climate Type	ST	ST	ST	T
Cooling	Defrost	No-Frost	No-Frost	No-Frost
Refrigerant	R134a/R600a	R134a/R600a	R134a/R600a	R134a/R600a
Machine Dimension	520*572*815	554*551*1440	554*571*1687	596*623*1763
Packing Dimension	560*590*855			
Rated/Frequency	220V/110V	220V/110V	220V/110V	220V/110V
Loading Capacity	230pcs/40HQ	136 pcs/40HQ	106 pcs/40HQ	73 pcs/40HQ
Approval	CE/UL	CE	CE	CE

## NO-FROST REFRIGERATOR



STORAGE

NO-FROST COMBI REFRIGERATOR

All volume of No-Frost Refrigerator available.

Model	BCD258W	BCD311W	BCD405W	BCD508W
Total(L/Cu.Ft.)	258	311	405	540
Refrigerator(L/Cu.Ft.)	194	237	300	388
Freezer(L/Cu.Ft.)	64	74	105	122
Climate Type	N/ST	N/ST	N/ST	N/ST
Cooling	NO-FROST	NO-FROST	NO-FROST	NO-FROST
Refrigerant	R134a	R134a	R134a	R134a
Machine Dimension	600*623*1493	600*750*1512	710*669*1721	722*820*1693
Packing Dimension	660*700*1575	660*775*1600	772*700*1794	769*843*1777
Rated/Frequency	220V/110V	220V/110V	220V/110V	220V/110V
Loading Capacity	96pcs/40HQ	87pcs/40HQ	70pcs/40HQ	56pcs/40HQ
Approval	CSA/SASO/EER	CSA/SASO/EER	SASO/EER	ETL

## Chest Freezer



Stainless steel door 300/400/500/600L available

Chest freezer with UL and ENERGY STAR approval also available.

STORAGE

Model		BD100	BD150	BD200	BD100A++	BD200A++
Volume	litre	105	155	215	110	210
Input power	W /A	52	78	82	90	95
Energy Class		A+	A+	A+	A++	A++
Energy	kWh/year	168	197	219	138	197
Energy	kWh/24 h	0.48	0.54	0.6	0.38	0.54
Unit dimensions	mm	676*560*835	896*560*835	910*720*835	698*518*845	948*598*845
Net weight	kg	34.0	38.0	42.0	51.0	62.0
Packing	mm	693*575*880	913*575*880	927*735*880	745*582*885	995*663*885
Gross weight	kg	37.0	41.0	46.0	55.0	68.0
40HC Container	pcs	204	156	114	190	124
Approval		CE/UL/MEPS	CE/UL/MEPS	CE/UL/MEPS	CE	CE

## Pharmacy Refrigerator / Low-temperature freezer &lt;-40/65/86/105'C&gt;



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
BC29/SC29	29	+2~+8	445	485	535	
BC59/SC59	59	+2~+8	445	485	725	
BC125/SC125	125	+2~+8	595	595	820	
BC300/SC300	300	+2~+8	595	595	1500	
BC400/SC400	400	+2~+8	595	595	1845	



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
DW-86W108	108	-86	900	670	795	
DW-86W208	208	-86	1050	670	795	
DW-86W308	308	-86	1400	670	795	



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
DW-40LD268	268	-40	600	700	1750	
DW-65LD388	388	-65	840	940	1999	
DW-86LD388	388	-86	840	940	1999	
DW-105BD138	138	-105	1320	890	1009	

## Low-temperature freezer &lt;-40°C &gt;



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
DW-40LSD45	50	-40	460	440	790	
DW-40LSD268	268	-40	595	585	1870	
DW-40LSD368	368	-40	680	670	1920	
DW-50SD60	60	-50	520	500	800	



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
DW-40W218Y	218	-40	875	655	770	
DW-40W258Y	258	-40	1075	655	770	
DW-40W308Y	308	-40	1245	655	770	
DW-40W358Y	358	-40	1405	655	770	



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
DW-40W60S	60	-40	520	500	795	
DW-40W108S	108	-40	900	670	795	
DW-40W208S	208	-40	1050	670	795	
DW-40W308S	308	-40	1400	670	765	

### Low-temperature freezer <-40°C/-60°C>



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
DW-40W60	60	<b>-40</b>	520	500	795	
DW-40W108	108	<b>-40</b>	900	670	795	
DW-40W208	208	<b>-40</b>	1050	670	795	
DW-40W308	308	<b>-40</b>	1400	670	795	
DW-40W388	388	<b>-40</b>	1400	670	795	
DW-40W468	468	<b>-40</b>	1600	670	795	
DW-40W568	568	<b>-40</b>	1880	670	795	



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
DW-60W60	60	<b>-60</b>	520	500	795	
DW-60W108	108	<b>-60</b>	900	670	795	
DW-60W208	208	<b>-60</b>	1050	670	795	
DW-60W308	308	<b>-60</b>	1400	670	795	



MODEL	VOLUME (L)	REFRIGERANT °C	PRODUCT DIMENSION (mm)			REMARK
			L	W	H	
DW-60W60S	60	<b>-60</b>	520	500	795	
DW-60W108S	108	<b>-60</b>	900	670	795	
DW-60W208S	208	<b>-60</b>	1050	670	795	
DW-60W308S	308	<b>-60</b>	1400	670	765	



Custom-made Products



Bar bottle cooler



Side mounted Back Bar Cooler



Keg cooler



Keg Dispenser



Absorption wine cooler



Blast Chiller/Freezer



School Milk Cooler



Absorption refrigerator



Towel Warmer




Pre-mix soda dispenser



Ice Merchandiser



Fruit showcase

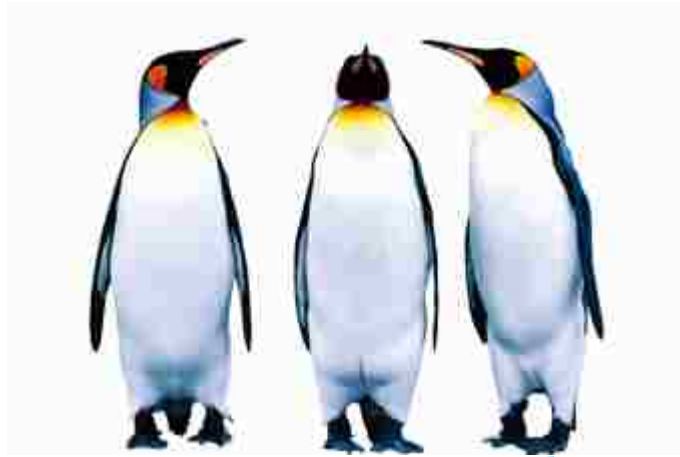

Thank You !