



Undercounter glasswasher ecomaxTM 400
Undercounter dishwasher ecomaxTM 500


High performance machines designed to deliver sparkling clean dishes and glasses every time

- Push button controls ensure simple operation and reliability
- Strong and durable double skin door
- Robust stainless steel construction
- Low power and water consumption


Undercounter glasswasher ecomax™ 400
Undercounter dishwasher ecomax™ 500

Technical Data

ecomax™ 400

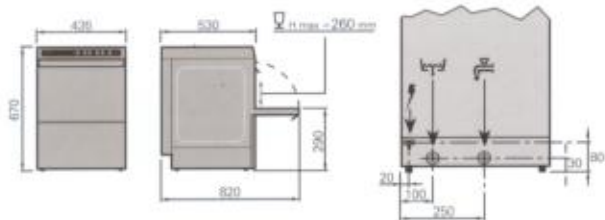

ecomax™ 500

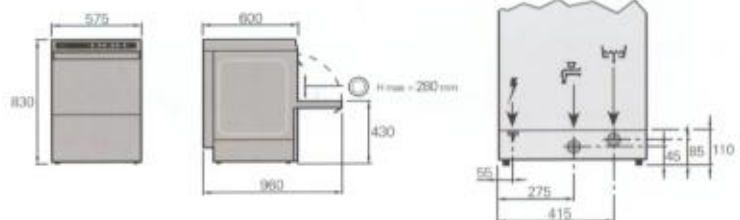

	ecomax™ 400	ecomax™ 500	
Cycle selections	150 sec.	180/60 sec.	120/60 sec.
Usable chamber height	260 mm	280 mm	
Rack size	385 x 385 mm	500 x 500 mm	
Tank capacity	11 L	33 L	
Rinse usage per rack	2 L	3 L	
Wash pump	0.25 kW	0.6 kW	0.8 kW
Booster/tank heat	2.65/0.6 kW	3.0/3.0 kW	6.0/3.0 kW
Total connected load	3.45 kW	3.65 kW	6.8 kW
Inlet water flow pressure	2-4 bar	2-4 bar	
Minimum inlet water temperature	50 °C	50 °C	10/15 °C
Thermostop	Not available	Standard	
Fill hose supplied	R3/4", 1500 mm	R3/4", 1500 mm	
Power cord supplied	1500 mm	1500 mm	
Electrical spec*	230/50/1, 220/60/1	230/50/1, 220/60/1	400/50/3, 220/60/3

As product improvement is a policy at Hobart specifications are subject to change

*Other electrical specification available on request

ecomax™
by **HOBART**

Hobart Food Equipment
Tianjin, China
Tel: 86-22-2397-4914

Hobart Hongkong
PMI Food Equipment (HK) Ltd.
Hongkong SAR
Tel: 852-23419315

Hobart International, Inc
(Singapore) Pte. Ltd.
Tel: 65-6846 7117