

# KM-201B\_H

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-201B\_H

04/18/16

Item # 13238

### CUBER DIMENSIONS W x D x H

**KM-201B\_H**  
24 x 28 x 39\*  
\*with 6" legs





### KM-201BAH

Air-Cooled  
Shown

### KM-201BWH

Water-Cooled

- Up to 215 lbs. of ice production per 24 hours
- Built-in 60 lbs. ice storage capacity\*
- Individual crescent cube
- Durable stainless steel exterior
- Ice bin opening is ADA compliant
- CycleSaver™ Design 
- EverCheck™ alert system 
- Stainless steel evaporator
- Removable air filter (Air-cooled model only)
- R-404A Refrigerant

\* The KM-201BAH is ENERGY STAR qualified.

### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.

\* Rated in accordance with AHRI Standard 820 (I-P)



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



# Hoshizaki

## SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

KM-201B\_H

**DIMENSIONS**  
W x D x H  
**KM-201B\_H**  
24 x 28 x 39"  
\*with 6" legs

- Air-cooled
- Water-cooled

### AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	201	190	176
80°	193	177	162
90°	190	165	150

### WATER-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	215	205	192
80°	207	192	180
90°	205	181	168


### UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-201BAH	4	182	7.5	22.0	N/A
KM-201BWH	4	182	6.17	24.0	141.3

### SPECIFICATIONS

Model Number	Condenser	Amperage	Shipping Weight
KM-201BAH	Air-Cooled	6.1	177 lbs.
KM-201BWH	Water-Cooled	5.5	177 lbs.


### \*KM CUBE DIMENSIONS



\*approximate size in inches, image not to scale


### ELECTRICAL & PLUMBING/KM-201B\_H

- 115V/60/1
- 15 amp Max Fuse/HACR Breaker Size
- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must be Independent of Icemaker)
- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

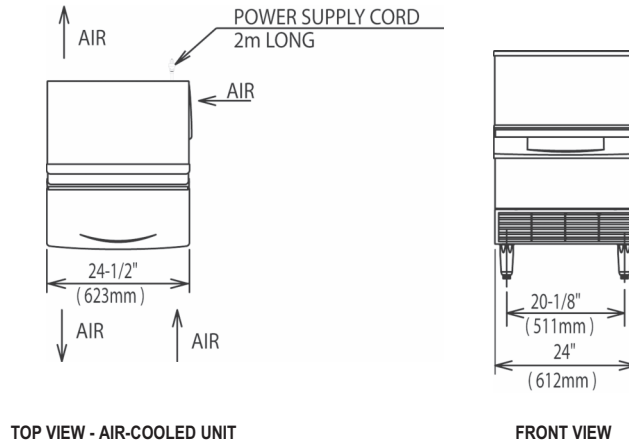


TOP VIEW - AIR-COOLED UNIT


FRONT VIEW

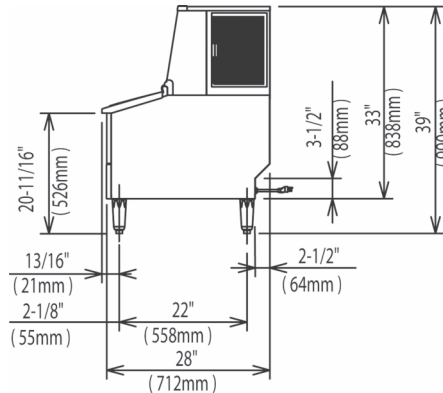

SIDE VIEW  
(LOUVERS ON AIR-COOLED UNIT ONLY)

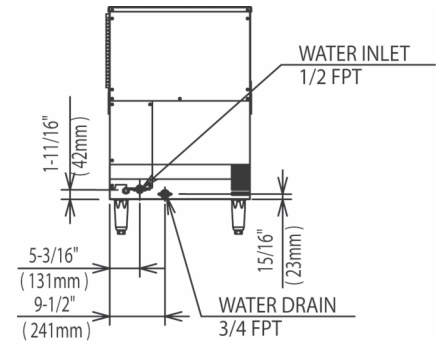

BACK VIEW - AIR-COOLED UNIT

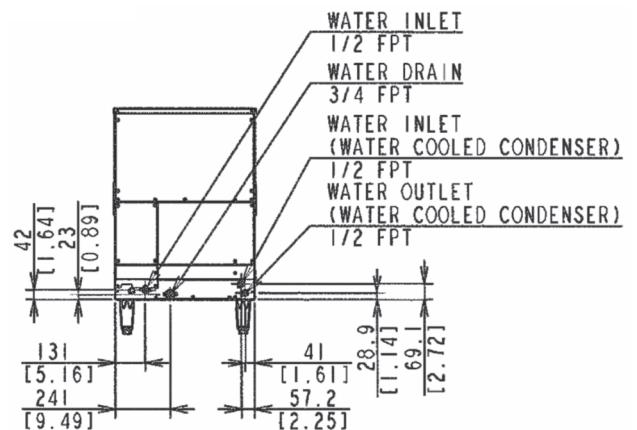

BACK VIEW / AIR-COOLED UNIT

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

### SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters (Air-cooled model only)



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

