

# NU 100



## Self Contained Ice Machine up to 60 kg

Item #:
Project:
Quantity:



### FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU 100  
Dice 10 g  
W 22 x D 22 x H 22 mm



NU H 100  
Half Dice 6 g  
W 10 x D 22 x H 28 mm



NU L 100  
Large Dice 15 g  
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### INTERNAL BIN CAPACITY

20 kg

### REFRIGERANT GAS

R404A

### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

### VOLTAGE V/Hz/ph

230/50/1

Certifications:



**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine up to 60 kg


# NU 100



## Self Contained Ice Machine up to 60 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 60 kg

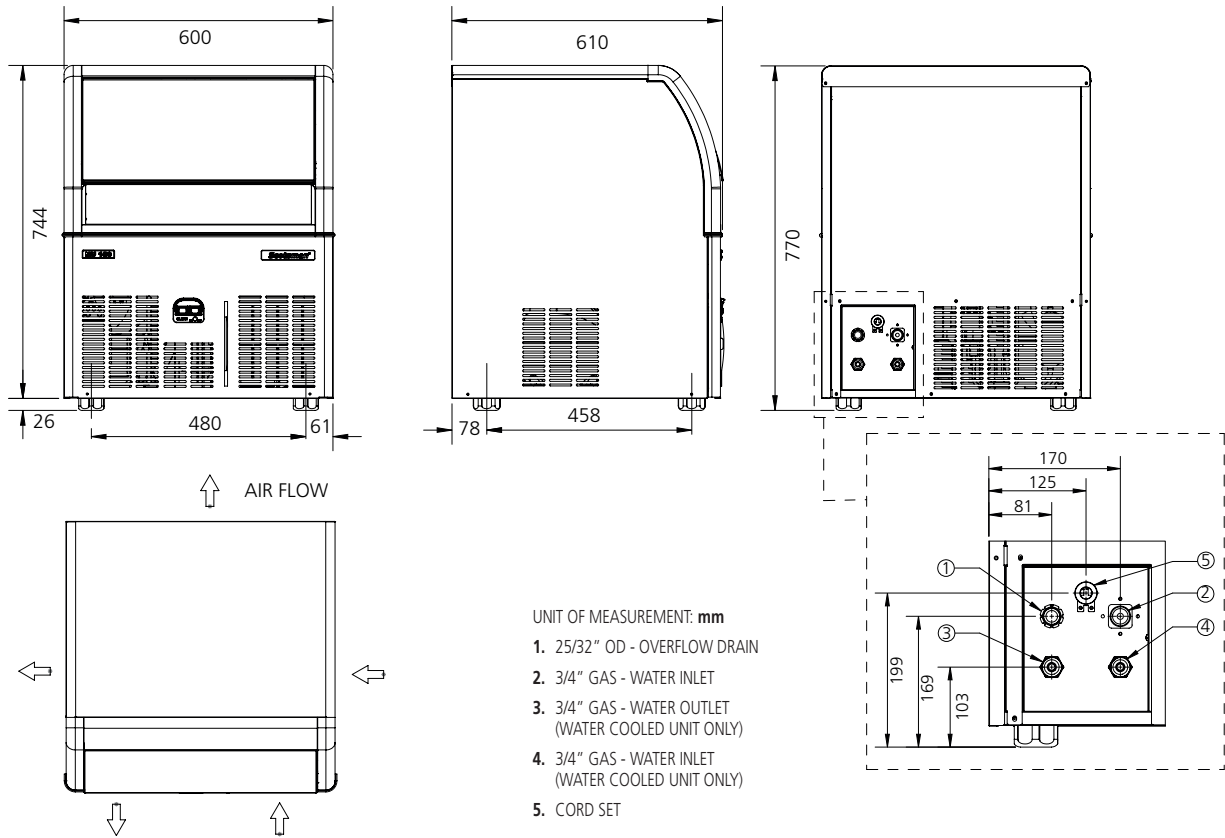

UNIT DATA		Compressor		Circuit wires		Max. fuse size		
		Version	Voltage	Btu/h	W	No.	Ømm <sup>2</sup>	A
Size (W x D x H)	600 x 610 x 770 mm	NU 100 AS	230/50/1	2661	780	3	1.5	10
Net weight	50 kg	NU H 100 AS	230/50/1	2661	780	3	1.5	10
SHIPPING DATA		NU L 100 AS	230/50/1	2661	780	3	1.5	10
		NU 100 WS	230/50/1	2661	780	3	1.5	10
		NU H 100 WS	230/50/1	2661	780	3	1.5	10
		NU L 100 WS	230/50/1	2661	780	3	1.5	10
Carton (W x D x H)	670 x 680 x 920 mm							
Weight	60 kg							

Version	Condensation	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NU 100 AS	Air	230/50/1	56	45	32	27.8	8.9	3.5	450
NU H 100 AS	Air	230/50/1	56	45	32	27.8	8.9	3.5	450
NU L 100 AS	Air	230/50/1	60	50	40	27.8	11.1	4.4	450
NU 100 WS	Water	230/50/1	56	45	32	27.8	8.9	26.4	450
NU H 100 WS	Water	230/50/1	56	45	32	27.8	8.9	26.4	450
NU L 100 WS	Water	230/50/1	60	50	40	27.8	11.1	33.1	450

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions