

NW608



NW458

NW608

NW1008

NW Series Modular Cube Ice Maker



Vertical Cube System




T304 Stainless Steel Panels



Proximity Condenser Air Filter

- RESET
- HIGH PRESSURE
- ALARM
- BIN FULL
- ICE MAKING
- ON/ OFF

Auto-alert Indicator Lights



Water Cooled Condenser Options



Double Stack
(Needs a stacking kit sold separately)

24 Hour Volume Production

| Air Cooled | | | Water Cooled | | |
|---------------------------------|--------------|---|---------------------------------|--------------|---|
| 70 F/21 C 50 F/10 C lb/kg | Air Water | AHRI 90 F/32 C 70 F/21 C lb/kg | 70 F/21 C 50 F/10 C lb/kg | Air Water | AHRI 90 F/32 C 70 F/21 C lb/kg |
| 616/280 | | 470/210 | 606/275 | | 562/255 |

Cube Ice



Full Cube - 12g
(26.5 x 26.5 x 26 mm)

Half Cube - 6g
(13 x 26.5 x 26 mm)

Modular Bin Options

NB 393



Storage Capacity: 178kg

NB 530



Storage Capacity: 243kg


NB 948



Storage Capacity: 406kg



Dimension

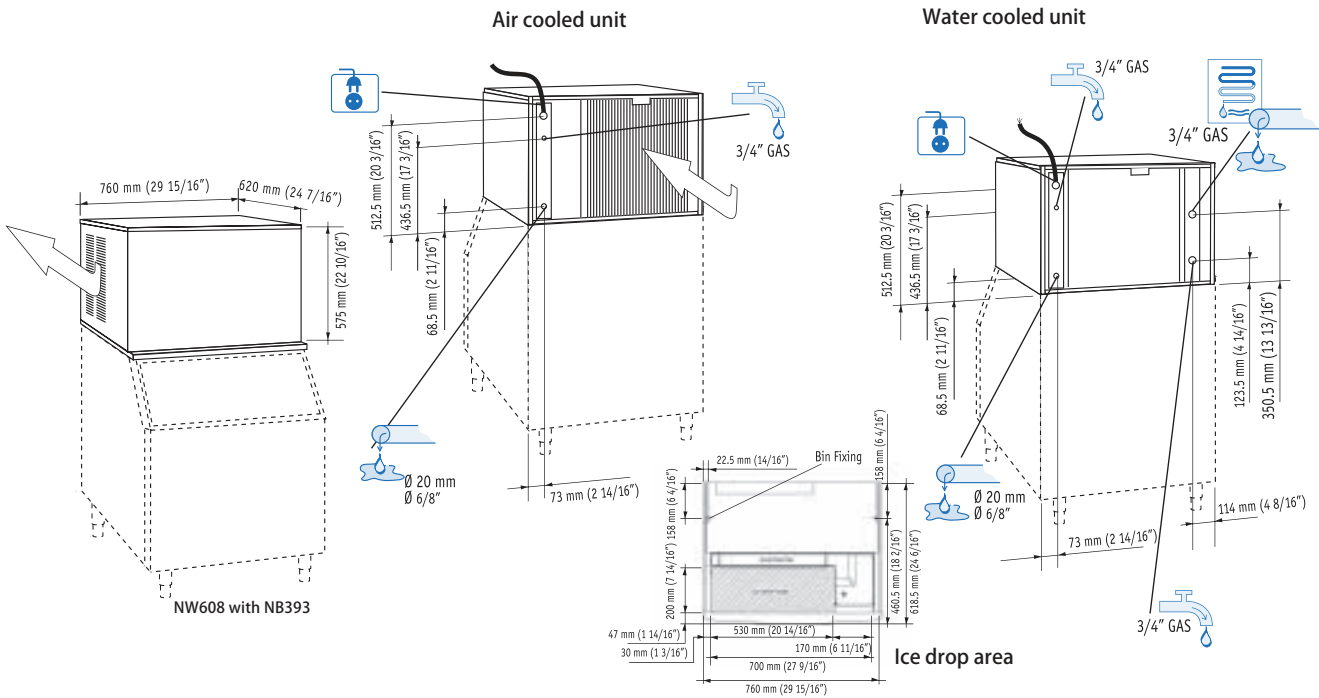

Specifications

| | | | [Btu/h] [W] | [Ømm ²] | [V/Hz/Ph] | [W] | FUSE | [kwh/100lbs] | [L/100lbs] | [kg] | [lbs] | [kg] | [lbs] |
|-----------|--|--|-------------|---------------------|-----------|------|------|--------------|------------|------|-------|------|-------|
| NW608 AS | | | 16600 4850 | 3x1.5 | 230/50/1 | 1600 | 16 A | 7.41 | 65.6 | 73 | 161 | 88 | 194 |
| NW608 WS | | | 16600 4850 | 3x1.5 | 230/50/1 | 1300 | 16 A | -- | -- | 72 | 158 | 87 | 191 |
| NWH608 AS | | | 16600 4850 | 3x1.5 | 230/50/1 | 1600 | 16 A | 7.41 | 65.6 | 73 | 161 | 88 | 194 |
| NWH608 WS | | | 16600 4850 | 3x1.5 | 230/50/1 | 1300 | 16 A | -- | -- | 72 | 158 | 87 | 191 |

Performance Table

| | | NW608 AS NWH608 AS | | | | | NW608 WS NWH608 WS | | | | | | |
|--|-----|-----------------------|-----|-----|-----|-----|-----------------------|-----|-----|-----|-----|-----|-----|
| | | 50° | 60° | 70° | 90° | 50° | 60° | 70° | 90° | 50° | 60° | 70° | 90° |
| | | 10° | 15° | 21° | 32° | 10° | 15° | 21° | 32° | 10° | 15° | 21° | 32° |
| | 10° | 320 | 305 | 290 | 260 | 280 | 275 | 270 | 250 | 280 | 275 | 270 | 250 |
| | 50° | 704 | 671 | 638 | 572 | 617 | 606 | 595 | 551 | 617 | 606 | 595 | 551 |
| | 21° | 280 | 275 | 265 | 240 | 275 | 270 | 265 | 245 | 275 | 270 | 265 | 245 |
| | 70° | 616 | 605 | 583 | 528 | 606 | 595 | 584 | 540 | 606 | 595 | 584 | 540 |
| | 32° | 225 | 220 | 210 | 195 | 265 | 260 | 255 | 235 | 265 | 260 | 255 | 235 |
| | 90° | 496 | 485 | 470 | 430 | 584 | 573 | 562 | 518 | 584 | 573 | 562 | 518 |
| | 38° | 190 | 188 | 180 | 174 | 250 | 245 | 240 | 225 | 250 | 245 | 240 | 225 |
| | 100 | 418 | 414 | 405 | 383 | 351 | 351 | 351 | 351 | 351 | 351 | 351 | 351 |

24h

Operating Range

| Minimum | Maximum |
|-----------------|-----------------|
| 10°C (50°F) | 40°C (103°F) |
| 5°C (41°F) | 35°C (95°F) |
| -10% | +10% |
| 1 BAR 14 psi | 5 BAR 70 psi |

IMPORTANT NOTICE:
 Models and specifications are subject to change without notice.
 This spec sheet is meant for commercial purpose only.
 For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-china.com

Scotsman
 Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg