



XV1093

Project _____

Item _____

Quantity _____

Date _____

Model
CHEFLUX™

| | |
|-------------------------------------|------------------------|
| Convection oven | Electric |
| 20 trays GN 1/1 | Hinge on the left side |
| Knob | |
| Voltage: 380-415V 3N~ / 220-240V 3~ | |



Description

Dry air-steam combi oven with analogical control and 304 stainless steel cooking chamber. Time, temperature, steam percentage and 2 fan speeds function. Allows to perform traditional cooking processes such as steaming, browning, grilling, frying and cooking of fresh and frozen bakery products.

Standard cooking features

Manual cooking

- **Temperature:** 80 °C – 260 °C
- Convection and humidity cooking starting from 80 °C

Advanced and automatic cooking features

Unox Intensive Cooking





- **DRY.Plus:** rapidly extracts humidity from the cooking chamber
- **STEAM.Plus:** creates instant humidity
- **AIR.Plus:** multiple fans with reverse gear and 2 speed settings

Key features

- Cooking chamber in high-resistance AISI 304 stainless steel with rounded edges
- Double glass
- Cooking chamber lighting through LED lights embedded in the door
- Tray supports with anti-tip system
- 2-speed fan system and high-performance circular heating elements



XV1093

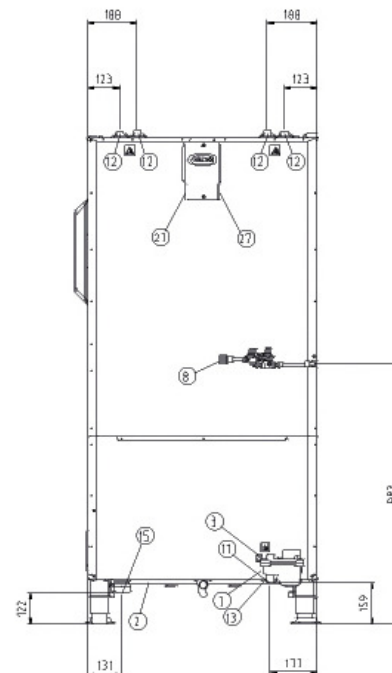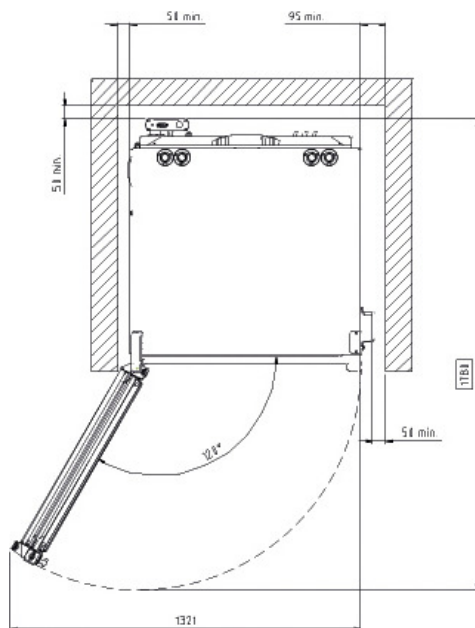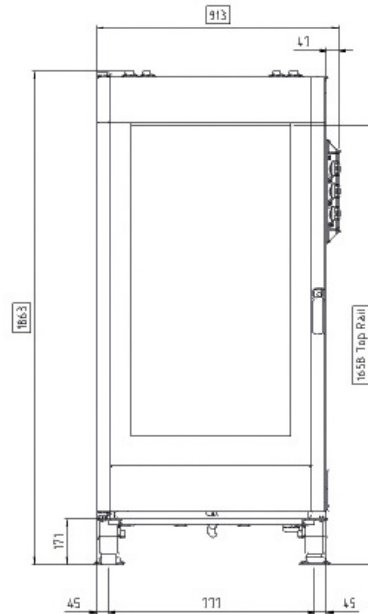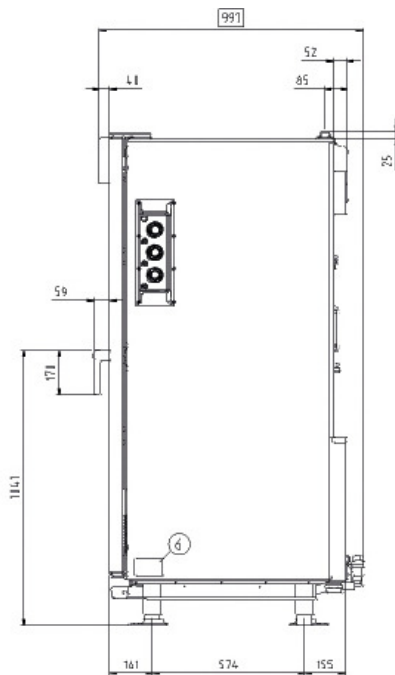

Dimensions and weight

| | |
|------------|---------|
| Width | 913 mm |
| Depth | 997 mm |
| Height | 1863 mm |
| Net weight | 240 kg |
| Tray pitch | 66 mm |

Connection positions

| | |
|----|-----------------------------|
| 2 | Terminal board power supply |
| 3 | Unipotential terminal |
| 6 | Technical data plate |
| 7 | Safety thermostat |
| 8 | 3/4" female NPT water inlet |
| 11 | Chamber drain pipe |

| | |
|----|---------------------------|
| 12 | Hot fumes exhaust chimney |
| 13 | Accessories connection |
| 15 | Strain relief |
| 22 | Water pump inlet |



XV1093

Power supply

Water connection

Installation requirements

Accessories

Electrical power supply

STANDARD

| | |
|---------------------------|-------------------------|
| Voltage | 380-415 V |
| Phase | ~3PH+N+PE |
| Frequency | 50 / 60 Hz |
| Total power | 29.7 kW |
| Max Amp draw | 44 A |
| Required breaker size | 50 A |
| Power cable requirements* | 5G x 10 mm ² |
| Plug | NOT INCLUDED |

OPTION A

| | |
|---------------------------|-------------------------|
| Voltage | 220-240 V |
| Phase | ~3PH+PE |
| Frequency | 50 / 60 Hz |
| Total power | 29.7 kW |
| Max Amp draw | 74 A |
| Required breaker size | 80 A |
| Power cable requirements* | 4G x 16 mm ² |
| Plug | NOT INCLUDED |

*Recommended size - observe local ordinance.

Accessories

- **Cooking Essentials:** special trays
- QUICK.Load
- **SPRAY&Rinse:** Practical spray detergent to manually clean all kinds of oven. It degreases and removes all kind of dirt
- **PURE-RO:** Reverse osmosis system that eliminates Chlorides and limescale from water
- **PURE:** resin-based filtering system that eliminates from the water all substances that contribute to the formation of limescale inside the oven cooking chamber

Water Supply

USING A WATER SUPPLY THAT DOES NOT MEET UNOX'S MINIMUM WATER QUALITY STANDARDS WILL VOID ANY WARRANTY.

It is the responsibility of the purchaser to ensure that the incoming water supply is compliant with the listed specifications through adequate treatment measures.

Drinking water inlet: 3/4" NPT*, line pressure:

Line pressure: 22 to 87 psi; 1.5 to 6 Bar (29 psi; 2 Bar recommended)

Inflow water specifications

Free chlorine ≤ 0.5 ppm

Chloramine ≤ 0.1 ppm

pH 7 - 8.5

Electrical conductivity ≤ 1000 µS/cm

Total hardness ≤ 8° dH

Chlorides ≤ 25 ppm

To avoid the formation of limescale the incoming water must have total hardness ≤ 8°dH.

Installation requirements

Installations must comply with all local electrical systems, particularly as for minimum wire gauge required for field connection, hydraulic and ventilation supply. Exhaust and fume analysis must be performed in case of gas ovens.

Register to DDC Service to access data and product specifications.
www.ddc.unox.com